



www.ams.sg

新加坡总部
Singapore office 

No. 449 Tagore Industrial Avenue, #04-01
Greatland Industrial Building, Singapore
787820

中国上海办事处
Shanghai, China 

No. 140, HuNan Highway Lane 9399,
Shanghai City, China

英国剑桥郡办事处
Cambridgeshire, UK 

3 Top Field, Leverington, Wisbech,
Cambridgeshire, England PE13 5FE

日本办事处
Japan office 

202, Sere-No A 1-4513, Kawatsu Sakaide
7620025, Japan

AMS SYSTEM SERVICES PTE LTD

PMTD-2301 双层小型服装自动折叠包装机

PMTD-2301 Double layer Small Automatic Folding and Packing Machine



机器特点 Machine Features



高效包装
Efficient packaging

自动批量折叠各类薄款上衣、裤子，自动折叠裤裆；
Automatically fold various types of thin clothes and trousers, with automatic crotch folding function.



自动装袋
Automatic bagging

自动包装入袋；可选配封袋模块
Automatic bag opening and packing folded garments into the bag.
Sealing modes can be ordered separately.



调节尺寸
Adjusting dimensions

可自由调节折叠长度、宽度
Adjustable folding length and width.



触控屏幕
Touch screen

触控屏幕调节参数；自动计件，实时监测产能
Touch screen to adjust parameters. Auto-counter, real-time monitoring of productivity.



专利技术
Patent technology

独创专利技术，更高效、稳定
Unique patented technology, more efficient and stable.


产品介绍 Product Introduction

一款经济款自动化服装折叠包装设备。机器特点：体积较小，占地面积小，高性价比，适合中小型服装工厂，机器通用性强，折叠的长宽可以调节，适用的服装范围广。机器实现了服装自动折叠、自动折裤裆，自动装袋的连续化操作，提高了服装折叠的规范程度及包装效率，降低人工成本，适用于各类服装企业。

机器包装速度：一小时 400 件。一台机器配 1-2 个人工，可实现日均包装 4000 件的量。

An economical automatic clothing folding and packing equipment. Machine features: small size, high cost-effectiveness, suitable for small and medium-sized clothing factories. Adjustable folding length and width, suitable for a wide range of clothing. The machine has achieved continuous operation of automatic folding, crotch folding, and automatic bagging, improving the standardization of clothing folding and packing efficiency, reducing labor costs, suitable for various clothing enterprises.

Machine packaging speed: 400 pieces/hour. One machine equipped with one manual worker can achieve an average daily packing of 4000 pieces.

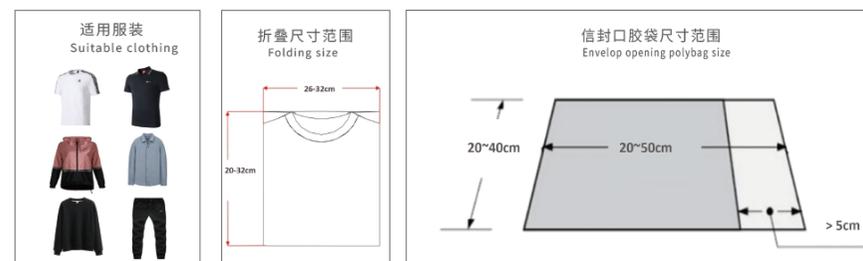

适用服装 Applicable clothing

T恤，Polo衫，圆领卫衣，工作服，休闲衬衫，
薄款针织衫，等薄款上衣及裤子。

T-shirts, Polo shirts, round neck sweaters, work clothes,
casual shirts, thin knitwear, thin trousers etc.

适用胶袋 Applicable plastic bags

PP/OPP/PE 信封口胶袋


PP/OPP/PE Envelop opening plastic bag

技术参数 Technical Parameter

服装尺寸范围 Clothing size range	宽(W)35-80cm, 长(L)40-80cm
折叠尺寸范围 Folding size range	宽(W)26-32cm, 长(L)20-32cm
胶袋尺寸范围 Size range of plastic bags	宽(W)26-42cm, 长(L)28-52cm
最大速度 Maximum speed	400件/小时 400 pieces/hour
功率 Power	0.6 KW
电压 Voltage	220V
气压 Air Pressure	0.6Mpa
机器尺寸 Machine dimensions	L2460*W900*H730 mm

PMTD-4602S 服装自动折叠包装机

PMTD-4602S Automatic Folding and Packing Machine for Thin Clothing

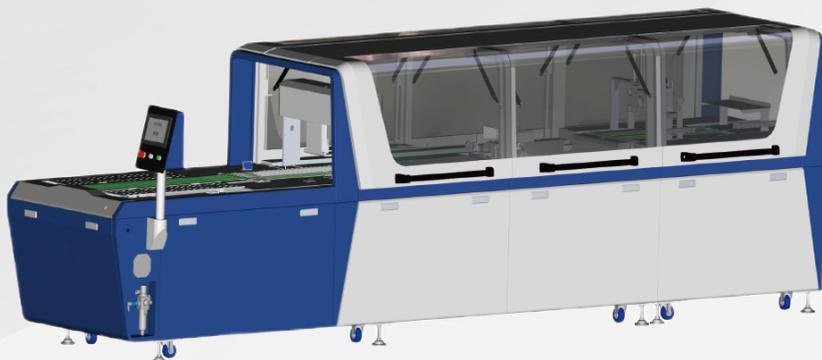

机器特点 Machine Features

- 
高效包装
Efficient packaging
自动批量折叠各类薄款服装、自动开袋，自动装袋
Automatically fold various types of thin clothing in batches, automatically open bags, and automatically pack into bags.
- 
自动封袋
Automatic bag sealing
两种封袋模式可选
Two bag sealing modes can be selected.
- 
调节尺寸
Adjusting dimensions
可自由调节折叠的长度、宽度
Adjustable folding length and width.
- 
触控屏幕
Touch screen
触控屏幕调节参数；自动计件，实时监测产能
Touch screen to adjust parameters. Auto-counter, real-time monitoring of productivity.
- 
专利技术
Patent technology
独有领先专利技术，更高效、稳定
Unique leading patented technology, more efficient and stable.


产品介绍 Product Introduction

一款适用于薄款服装的自动化折叠包装设备，高性价比。机器实现了服装自动折叠、自动包装入袋、自动封袋的连续化操作，提高了服装折叠的规范程度及折叠包装效率，大大降低人工成本，并提高服装工厂后整智能化、自动化水平，适用于各大服装工厂。

机器包装速度：一小时 550 件。一台机器配 1 个人工，可实现日均包装 5000 件的数量。

An automated folding and packing equipment suitable for thin clothing, with high cost-effectiveness. The machine has achieved continuous operations of automatic clothing folding, automatic packing into bags, and automatic sealing, improving the standardization of clothing folding and packing efficiency, greatly reducing labor costs, and improving the intelligence and automation level of clothing factories. It is suitable for major clothing factories.

Machine packaging speed: 500 pieces/hour. One machine equipped with one manual worker can achieve an average daily packing of 5000 pieces.

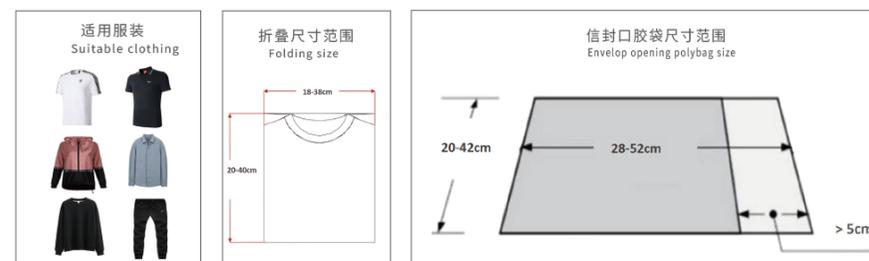

适用服装 Applicable clothing

T恤, Polo衫, 圆领卫衣, 工作服, 休闲衬衫, 薄款针织衫, 薄款夹克衫, 薄款外套等。
T-shirts, Polo shirts, round neck sweaters, work clothes, casual shirts, thin knitwear, thin jacket, thin jacket, etc.

适用胶袋 Applicable plastic bags

PP/OPP/PE 信封胶袋
PP/OPP/PE Envelop opening plastic bag

技术参数 Technical Parameter

服装尺寸范围 Clothing size range	宽(W)35-90cm, 长(L)40-90cm
折叠尺寸范围 Folding size range	宽(W)18-38cm, 长(L)20-40cm
胶袋尺寸范围 Size range of plastic bags	宽(W)20-42cm, 长(L)28-52cm
最大速度 Maximum speed	550件/小时 550 pieces/hour
功率 Power	1.2 KW
电压 Voltage	220V
气压 Air Pressure	0.6Mpa
机器尺寸 Machine dimensions	L4630*W1150*H1500 mm

自动折叠模块

AUTOMATIC FOLDING MODULE

PMTD-5201JYDJ 通用款服装自动折衣机

PMTD-5201JYDJ Automatic Folding Machine (suitable for thin and thick clothing)



机器特点 Machine features



高效包装
Efficient packaging

自动批量折叠各类厚薄款服装, 短袖自动回袖;
Automatic bulk folding of various thin and thick clothing, automatic folding back of short sleeve.



效率
Efficiency

600件/小时, 约5000件/天;
600 pieces/hour, approximately 5000 pieces/day



灵活组合
Flexible combination

可与领创其他任意模块自由组合使用;
Can be freely combined and used with any other module of LC.



调节尺寸
Adjusting dimensions

可自由调节服装折叠的长、宽;
Can freely adjust the folding length and width of clothing.



触控屏幕
Touch screen

触控调节参数, 可保存不同服装参数; 实时检测产能
Touch screen to adjust parameters, different fabrics parameters can be saved. Auto-counter, real-time monitoring of productivity.



专利技术
Patent Technology

领先的专利技术, 更高效、更稳定!
Leading patented technology, more efficient and stable!

产品介绍 Product Introduction

一款厚薄款服装通用款自动化折叠设备。可实现薄款面料短袖自动回折, 或厚款面料自动加压折叠。另外可选配自动包纸, 自动折叠裤裆裤褶, 实现多功能、通用性强的自动化服装折叠机, 大大提高服装折叠的规范程度及折叠效率, 降低人工成本, 提高服装工厂后整自动化水平, 适用于各大服装工厂。

机器包装速度: 一小时 450-600 件。一台机器配 1 个人工, 可实现日均包装 5000 件的量。


A general automatic folding machine suitable for thin and thick clothing. It can realize automatic folding short sleeve of thin fabric, or automatic pressure folding of thick fabric. In addition, automatic paper wrapping and automatic crotch folding can be selected to achieve multi-functional and versatile automatic clothing folding, which greatly improves the folding standard and efficiency, reduces labor costs, improves the automation level of garment finishing, suitable for all kinds of garment factories.

Machine packing speed: 450-600 pieces per hour. A machine with 1 labor, can achieve the daily packaging of 5000 pieces. The machine has achieved continuous operations of automatic clothing folding, automatic packing into bags, and automatic sealing, improving the standardization of clothing folding and packing efficiency, greatly reducing labor costs, and improving the intelligence and automation level of clothing factories. It is suitable for major clothing factories.

适用服装 Applicable Clothing

T恤, Polo衫, 圆领卫衣, 带帽卫衣, 工作服, 休闲衬衫, 针织衫, 夹克衫, 薄款外套, 裤子等。

T-shirts, Polo shirts, hoodies, work clothes, casual shirts, knitwear, jacket, thin coat, trousers, etc

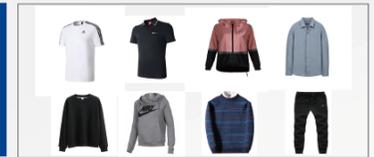

选配功能 Optional Functions

PMTD-HSFZ 自动放纸模块

PMTD-HSFZ Automatic Paper Feeding Module

PMTD-JYDZ 自动折叠裤裆模块

PMTD-JYDZ Automatic Folding Crotch of Trousers Module

技术参数 Technical Parameter


服装尺寸范围 Clothing size range	宽(W)35-82cm, 长(L)40-90cm
折叠尺寸范围 Folding size range	宽(W)18-38cm, 长(L)20-40cm
最大速度 Maximum speed	600件/小时 600 pieces/hour
功率 Power	1.2 KW
电压 Voltage	220V
气压 Air Pressure	0.6Mpa
机器尺寸 Machine dimensions	L2790*W1140*H1420 mm

自动装袋模块

AUTOMATIC BAGGING MODULE

PMTD-RDX01 服装自动装袋机 (适用信封口胶袋)

PMTD-RDX01 Automatic Clothing Bagging Machine (suitable for envelop opening plastic bags)

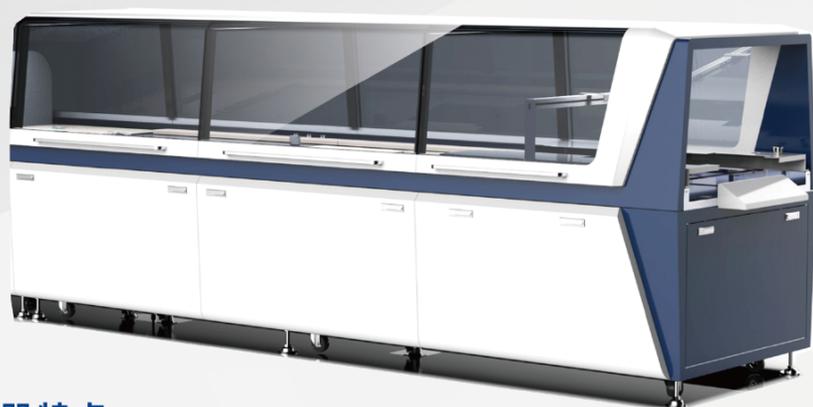

机器特点 Machine features



高效包装
Efficient packaging

机器自动打开信封口胶袋, 服装自动包装入袋;
Automatic opening the envelope plastic bags, automatic packing into the bags.



效率
Efficiency

600件/小时, 约5000件/天;
600 pieces/hour, approximately 5000 pieces/day



灵活组合
Flexible combination

可结合领创任意一款自动折衣机及其他模块灵活组合使用。
It can be flexibly combined with any automatic folding machine and other modules of LC.



调节尺寸
Adjusting dimensions

可根据胶袋的大小自由调节开袋装置;
Can freely adjust the bag opening device.



专利技术
Touch screen

领先的专利技术, 更高效、更稳定!
Leading patented technology, more efficient and stable!



www.ams.sg

产品介绍 Product Introduction


1. 自动检测来料;
2. 自动加压: 将厚款衣服和裤子二次加压, 确保厚款面料平整入袋;
3. 自动开袋: 机器自动打开信封口胶袋;
4. 自动入袋: 服装自动包装入袋;
5. 可结合领创任意一款自动折衣机及其他模块组合使用。

1. Automatic detection of incoming materials.
2. Automatic pressurization: Double pressurize thick clothes and pants to ensure that the thick fabric is flat and fits into the bag.
3. Automatic bag opening: Machine automatically opens the envelope plastic bag.
4. Automatic bagging: Clothing is automatically packed into the bag.
5. It can be flexibly combined with any automatic folding machine and other modules of LC.

适用胶袋 Applicable Clothing

胶袋类型及尺寸范围: PP/PE/OPP信封口胶袋, 长度范围28-52cm, 宽度范围20-42cm

T-shirts, Polo shirts, hoodies, work clothes, casual shirts, knitwear, jacket, thin coat, trousers, etc

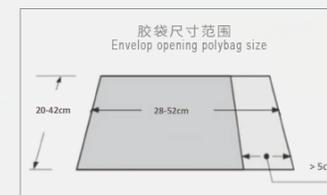

产品参数 Product Parameters

型号 Item No.	胶袋宽度范围 Polybag width range	胶袋长度范围 Polybag length range	最大速度 (件/小时) Max Efficiency (pcs/hour)	机器尺寸 (mm) Machine dimensions
PMTD-RDX01	W200-420 mm	L280*W520 mm	600	L2450*W1140*H1420
	电压 Voltage	气压 Air pressure	功率 Power	
	220V	0.6 Mpa	1.2 Kw	

其他胶袋类型装袋机 Optional Functions

PMTD-RDZ01 服装自动装袋机 (适用平口胶袋)

PMTD-RDZ01 Automatic Clothing Bagging Machine (suitable for flat opening plastic bag)

型号 Item No.	胶袋宽度范围 Polybag width range	胶袋长度范围 Polybag length range	最大速度 (件/小时) Max Efficiency (pcs/hour)	机器尺寸 (mm) Machine dimensions
PMTD-RDZ01	W200-400 mm	L300*W480 mm	600	L3350*W1140*H1420
	电压 Voltage	气压 Air pressure	功率 Power	
	220V	0.6 Mpa	1.2 Kw	

PMTD-RDL01 服装自动装袋封袋机 (适用压扣胶袋)

PMTD-RDL01 Automatic Clothing Bagging and Sealing Machine (suitable for Press buckle bag)

型号 Item No.	胶袋宽度范围 Polybag width range	胶袋长度范围 Polybag length range	最大速度 (件/小时) Max Efficiency (pcs/hour)	机器尺寸 (mm) Machine dimensions
PMTD-RDL01	W280-350 mm	L280*W520 mm	600	L3700*W1140*H1420
	电压 Voltage	气压 Air pressure	功率 Power	
	220V	0.6 Mpa	1.2 Kw	

自动封袋模块

AUTOMATIC SEALING MODULE


PMTD-SF01 胶袋自动封口机 (自动撕胶条封袋)

PMTD-SF01 Automatic bag sealing machine (Automatic tearing tape and Sealing)

机器功能 Machine Functions

1. 自动检测来料;
2. 机器自动检测胶条位置, 自动识别、抓取并撕掉胶条; 撕下的胶条自动收纳入废料孔;
3. 自动封合胶袋口;
4. 胶袋类型及尺寸范围: PP/OPP/PE信封自粘式胶袋, 长度范围 28-52cm, 宽度范围 20-42cm
5. 要求袋口胶条为一条实线, 便于机器检测识别并抓取。
6. 可结合任意一款领创自动装袋机灵活组合使用。

1. Automatic detection of incoming materials.
2. The machine automatically detects the position of the tapes, automatically grabs and tears the tapes. The waste tapes is automatically collected into the scrap box.
3. Automatic sealing the plastic bag.
4. Plastic bag type and size range: PP/OPP/PE envelope opening self-adhesive plastic bag, length range 28-52cm, width range 20-42cm
5. The tapes on mouth of the bag is required with a solid line, easy for machine to detect and grasp.
6. Flexible combination of any automatic folding machine and automatic bagging machine from LC.

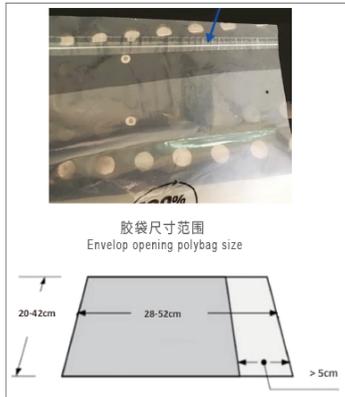

产品参数 Product Parameters

型号 Item No.	胶袋宽度范围 Polybag width range	胶袋长度范围 Polybag length range	最大速度 (件/小时) Max Efficiency (pcs/hour)	机器尺寸 (mm) Machine dimensions
PMTD-SF01	W200-420 mm	L280*W520 mm	600	L1100*W1140*H1420
	电压 Voltage	气压 Air pressure	功率 Power	
	220V	0.6 Mpa	0.2 Kw	

PMTD-RF01 胶袋自动封口机 (自动热熔封袋)

PMTD-RF01 Automatic bag sealing machine (Automatic heat sealing)

机器功能 Machine Functions

1. 自动检测来料;
2. 自动检测并识别袋内服装位置, 自动切除胶袋多余废料, 自动热熔封袋;
3. 热熔热封: 封口不留边;
4. 热熔冷封: 封口留边;
5. 热封或冷封二选一。
6. 可结合任意一款领创自动装袋机灵活组合使用。

1. Automatic detection of incoming materials;
2. Automatically detect and identify the clothing position in the bag, automatically remove the excess waste in the plastic bag, and automatically seal the bag with hot melt;
3. Heat sealing: seal without edge;
4. Cold sealing: seal with an edge;
5. Heat sealing or cold sealing, choose one of them.
6. Flexible combination of any automatic folding machine and automatic bagging machine from LC.



产品参数 Product Parameters

型号 Item No.	胶袋宽度范围 Polybag width range	胶袋长度范围 Polybag length range	最大速度 (件/小时) Max Efficiency (pcs/hour)	机器尺寸 (mm) Machine dimensions
PMTD-RF01	W200-420 mm	L280*W520 mm	600	L1100*W1140*H1420
	电压 Voltage	气压 Air pressure	功率 Power	
	220V	0.6 Mpa	0.2 Kw	

PMTD-TJ01 胶袋自动封口机 (自动贴透明胶封袋)

PMTD-TJ01 Automatic Plastic Bag Sealing Machine (Stick Transparent Tape Sealing)

机器功能 Machine Functions

1. 自动检测来料;
2. 自动识别封口位置, 根据设定的贴胶长度自动下拉透明胶, 自动贴透明胶封袋;
3. 使用卷料透明胶, 胶带宽度范围 1-1.8cm;
4. 可选择贴 1/2/3 条透明胶封袋; 透明胶间距可调节;
5. 贴胶前后位置可移动调节, 满足最小袋子和最大袋子贴胶位置;
6. 结合任意一款领创自动装袋机灵活组合使用。

1. Automatic detection of incoming materials;
2. Automatically identify the sealing position, automatically pull down the transparent adhesive according to the set adhesive length, and automatically apply the transparent adhesive to seal the bag.
3. Use roll transparent adhesive with a width range of 1-1.8cm.
4. You can choose to stick 1, 2, or 3 transparent adhesive sealing bags; Adjustable distance between transparent adhesives.
5. Paste position can be adjusted to meet the minimum and maximum bag Paste positions.
6. Flexible combination of any automatic folding machine and automatic bagging machine from LC.

产品参数 Product Parameters

型号 Item No.	胶袋尺寸范围 Polybag size range	透明胶尺寸范围 Transparent tape size range	最大速度 (件/小时) Max Efficiency (pcs/hour)	机器尺寸 (mm) Machine dimensions
PMTD-TJ01	宽 W200-420 mm 长 L280-520mm	宽 W10-18 mm 长 L70-80mm	600	L940 *W1140*H1420
	电压 Voltage	气压 Air pressure	功率 Power	
	220V	0.6 Mpa	1.2 Kw	

多功能选配模块

MULTIFUNCTIONAL OPTIONAL MODULE

PMTD-HBZ03 自动折后包纸模块

PMTD-HBZ03 Automatic Folding and Wrapping Module

机器功能 Machine Functions

1. 自动检测来料;
2. 机器根据已折叠的服装长度自动裁切拷贝纸;或按照设定的长度裁切;
3. 机器自动在已折叠的服装外层包裹一层拷贝纸;
4. 需使用卷料拷贝纸;厚度范围13-35CM,宽度范围:13-40CM;自由设置长度;
5. 结合任意一款领创自动折衣机和自动装袋机中间灵活组合使用。

1. Automatic detection of incoming materials;
2. The machine automatically cuts the paper according to the length of the folded clothing; Or cuts according to the set length;
3. The machine automatically wraps a paper on the outer layer of folded clothing;
4. Use roll material of paper, the thickness range of the roll material: 13-35CM, width range: 13-40CM. Length can be set freely;
5. Flexible combination of any automatic folding machine and automatic bagging machine from LC.



产品参数 Product Parameters

型号 Item No.	卷料纸直径尺寸 Roll paper diameter	卷料纸宽度尺寸 Roll paper width	速度 Efficiency	电压 Voltage	气压 Air pressure	功率 Power	机器尺寸 Machine dimension
PMTD-HBZ03	130-350 (mm)	130-400(mm)	600 pcs/h	220V	0.6 Mpa	0.2 Kw	L940*W1140*H1420 mm

PMTD-FZ01 自动翻转模块

PMTD-FZ01 Automatic Rotating Module

机器功能 Machine Functions

1. 自动检测来料;
2. 按照已设定好的翻转模式,改变已折叠完毕的服装朝向;
3. 可结合领创任意一款自动折衣机和自动装袋机中间灵活组合使用。

1. Automatic detection of incoming materials;
2. Change the orientation of the folded clothing according to the set flipping mode.
3. It can be flexibly combined with any automatic folding machine and automatic bagging machine from LC.



产品参数 Product Parameters

型号 Item No.	旋转角度 Rotation angle	速度 Efficiency	电压 Voltage	气压 Air pressure	功率 Power	机器尺寸 Machine dimension
PMTD-FZ01	左右0-180°	600 pcs/h	220V	0.6 Mpa	0.2 Kw	L620*W1140*H1420 mm


PMTD-TB01 自动贴尺码标机

PMTD-TB01 automatic size labeling machine

机器功能 Machine Functions

1. 自动检测来料;
2. 自动剥落尺码标,按照已设定好的位置自动贴在服装上面,或自动贴在服装折边处;
3. 可贴长标或短标,可自由调节和切换;可任意调节所贴的位置;
4. 需使用成卷的标签,单个标签长度范围20-150mm,宽度范围20-50mm;
5. 适用于领创自动折衣机和自动装袋机之间。

1. Automatic detection of incoming materials;
2. Automatically peel off the size label and attach it to the garment according to the set position, or automatically attach it to the hem of the garment;
3. It can be labeled with long or short labels, and can be adjusted and switched freely; The position of the sticker can be adjusted arbitrarily.
4. Use rolled labels material, with a single label length range of 20-150mm and a width range of 20-50mm;
5. Suitable to use between automatic folding machine and automatic bagging machine of LC

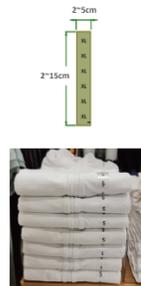

产品参数 Product Parameters

型号 Item No.	尺码标长度范围 Label length range	尺码标宽度范围 Label width range	速度 Efficiency	电压 Voltage	气压 Air pressure	功率 Power	机器尺寸 Machine dimension
PMTD-TB01	20 -150 (mm)	20 -50(mm)	600 pcs/h	220V	0.6 Mpa	0.2 Kw	L750*W1140*H1420 mm

PMTD-DZ 自动堆叠机

PMTD-DZ Automatic Stacker

机器功能 Machine Functions

1. 自动检测来料;
2. 对已折叠的服装进行多件堆叠;
3. 可自行设置需堆叠的数量;
4. 可结合领创任意一款自动折衣机和自动装袋机中间灵活组合使用。

1. Automatic detection of incoming materials.
2. Automatic multi-piece stacking for folded clothing according to the set.
3. The stacking quantity can be set according to requirement.
4. It can be flexibly combined with any automatic folding machine and automatic bagging machine of LC.



产品参数 Product Parameters

型号 Item No.	堆叠尺寸范围 Stacking range	速度 Efficiency	电压 Voltage	气压 Air pressure	功率 Power	机器尺寸 Machine dimension
PMTD-DZ	宽W200-420mm,高H10-120mm	600 pcs/h	220V	0.6 Mpa	0.2 Kw	L720*W1140*H1420 mm

多功能选配模块

MULTIFUNCTIONAL OPTIONAL MODULE

PMTD-TB03 自动贴条码标机

PMTD-TB03 Automatic Barcode Labeling Machine

机器功能 Machine Functions

1. 自动检测来料;
2. 使用成卷的成品条码, 机器自动自动剥落条码, 自动贴在胶袋面上指定位置;
3. 可结合任意一款领创自动装袋机或自动封袋机后端组合使用。

1. Automatic detection of incoming materials.
2. Using the printed barcode in rolls, machine automatically strips the bar code and sticks it to the designated position on the plastic bag surface.
3. It can be flexibly combined with any automatic bagging machine or automatic sealing machine of LC.



产品参数 Product Parameters

型号 Item No.	条码长范围 Label length range	条码宽度范围 Label width range	速度 Efficiency	功率 Power	机器尺寸 Machine dimension
PMTD-TB03	30 -70 (mm)	30 -70(mm)	600 pcs/h		
	电压 Voltage	气压 Air pressure	功率 Power	0.2 Kw	L620*W1140*H1420 mm
	220V	0.6 Mpa			

PMTD-TB04 自动贴条码标机(扫描实时打印)

PMTD-TB04 Automatic Barcode Labeling Machine (scan and instant printing)

机器功能 Machine Functions

1. RFID实时扫描需贴条码标的产品;
2. 机器按已设定好的条码格式自动实时打印条码;
3. 机器自动自动剥落条码, 自动贴在胶袋面上指定位置;
4. 可结合任意一款领创自动装袋机或自动封袋机后端组合使用。

1. RFID scanning of products requiring barcode labels.
2. Machine automatically prints the barcode according to the set barcode format.
3. Machine automatically strips the bar code and sticks it to the designated position on the plastic bag surface.
4. It can be flexibly combined with any automatic bagging machine or automatic sealing machine of LC.



产品参数 Product Parameters

型号 Item No.	条码长范围 Label length range	条码宽度范围 Label width range	速度 Efficiency	功率 Power	机器尺寸 Machine dimension
PMTD-TB04	30 -70 (mm)	30 -70(mm)	600 pcs/h		
	电压 Voltage	气压 Air pressure	功率 Power	0.2 Kw	L1100*W1140*H1420 mm
	220V	0.6 Mpa			


PMTD-LX01 自动落箱模块

PMTD-LX01 Automatic dropping in carton module

机器功能 Machine Functions

1. 自动检测来料;
2. 面板自动打开, 已折叠/包装完毕的服装自动落箱;
3. 可结合任意一款领创自动折衣机或自动装袋机或封袋机尾端组合使用。

1. Automatic detection of incoming materials;
2. The panel will automatically open, and the folded/packaged clothing will automatically drop off the box.
3. It can be flexibly combined with any automatic folding machine or bagging machine or sealing machine of LC.

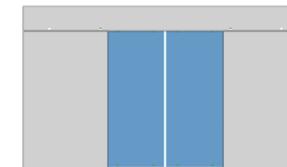

产品参数 Product Parameters

型号 Item No.	落箱服装尺寸范围 Dropping garment size range	速度 Efficiency	功率 Power	机器尺寸 Machine dimension
PMTD-LX01	长L280-520mm, 宽W200-420mm	600 pcs/h		
	电压 Voltage	气压 Air pressure	功率 Power	机器尺寸 Machine dimension
	220V	0.6 Mpa	0.2 Kw	L600*W1000*H263 mm


PMTD-LX02 自动翻边模块

PMTD-LX02 Automatic Upside down Turning Module

机器功能 Machine Functions

1. 自动检测来料;
2. 对接工厂输送线, 自动将已折叠/包装完毕的服装翻面到输送线上;
3. 可结合领创任意一款自动折衣机或自动装袋机中间灵活组合使用。

1. Automatic detection of incoming materials;
2. Docking factory conveyor line, automatically turn the folded/packed clothing to the conveyor line.
3. It can be flexibly combined with any automatic folding machine or bagging machine or sealing machine of LC.





产品参数 Product Parameters

型号 Item No.	翻边服装尺寸范围 Turning garment size range	速度 Efficiency	功率 Power	机器尺寸 Machine dimension
PMTD-LX02	长L280-520mm, 宽W200-420mm	600 pcs/h		
	电压 Voltage	气压 Air pressure	功率 Power	机器尺寸 Machine dimension
	220V	0.6 Mpa	0.2 Kw	L650*W1000*H263 mm

更多組合模式
MORE COMBINATIONS



更多組合模式
MORE COMBINATIONS

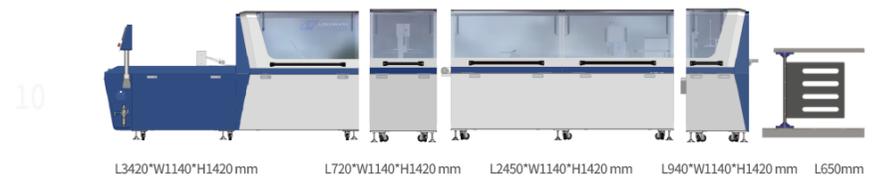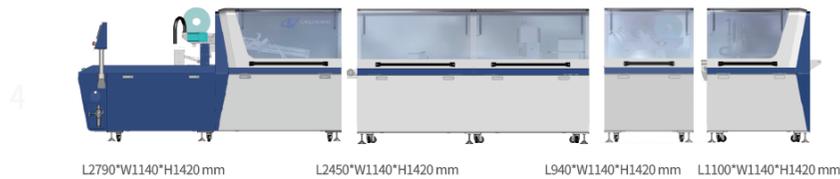

隧道式整烫机系列

TUNNEL FINISHER SERIES

QX-1000S 全自动隧道式熨烫整型机

QX-1000S Automatic Tunnel Ironing Machine



机器特点 Machine Features



适用服装广

Wide range of Application

各类厚、薄面料，针织、梭织等面料的服装通用，适用范围广泛；
Almost all kinds of thick, thin fabrics, knitted, woven and other fabrics of clothing are universal, a wide range of applications.



需外接锅炉

Require external boiler

外接锅炉
External boiler is needed.



高效熨烫

High efficiency Ironing

标准每小时熨烫800-1200件，一天约12000件；
Standard iron 800-1200 pieces/hour, around 12000 pieces/ day.



触控屏幕

Touch screen

触控调节参数，可保存不同面料参数；可实时监测产能；
Touch screen to adjust parameters, different fabrics parameters can be saved to switch. Auto-counter, real-time monitoring of productivity.



专利技术

Patent technology

独创专利技术，更低碳、更节能、无水渍、熨烫效果更佳！
Unique patented technology, more energy saving, no water stains after ironing, no water stains after ironing.

产品介绍 Product Introduction

用于大批量服装的熨烫整理、烘干消毒，同时可抖落衣服上的线头。机器适用各种服装面料，包括难处理面料。高效率全自动化熨烫，低碳、节能、无水渍。独创独有的熨烫专利技术，熨烫效果更佳！且可激活服装的颜色分子，使服装面料颜色更鲜艳！独创独特的气水分离技术，可分离蒸汽中99.5%的水分，达到熨烫后无水渍，节省人工烘干工序和时间。

将批量服装挂在送料缓存架上，自动进入隧道整烫机的高温蒸汽单元进行面料软化，送达热风单元进行烫平、烘干，出料自动送达落料缓存架上。一台机器日熨烫量约15000件，只需1-2人操作，大大减少大中烫工，降低人工成本，提高后整效率。

LC Tunnel finisher, it's an automated solution with high efficiency on finishing/ ironing of clothing. Machine use for ironing, drying of batches clothing, and shake off thread on garment at the same time. Machine applies almost all kinds of garments textiles, including challenging fabric. Lingchuang unique ironing patented technology, more energy saving, much better ironing effect, no water stains after ironing, and will activate color molecules of clothes, making fabrics more vibrant! Unique air & water separation technology, can separate 99.5% water in steam, makes fabric without water stains after ironing, saves manual drying process and time.

Machine with drying function, saving manual drying time and space. A machine daily ironing capacity of about 15,000 pieces, only 1-2 people to operate, greatly reduce the large and medium ironing, reduce labor costs, improve the efficiency of finishing.

QX-1000S 产品参数 QX-1000S Product Parameters

型号 Item No.	电压 Voltage	功率 Power	最大效率 Max Efficiency	重量 Weight
QX-1000S	380V	18Kw	800-1200件/小时	4200kgs
	空气消耗 Air consumption	蒸汽消耗 Steam consumption	气压 Air pressure	机器尺寸 Machine dimensions
	0.5立方/小时 0.5cube/hour	240kg/小时 240kg/hour	0.6Mpa	运输尺寸 9130*1120*2350 mm 安装尺寸 9130*1120*2350 mm

根据实际生产产能，另有QX-800S, QX-600S型号可供选择，具体参数如下：

According to the actual production capacity, there are QX-800S, QX-600S models can be selected, the specific parameters are as follows:

QX-800S 产品参数 QX-800S Product Parameters

型号 Item No.	电压 Voltage	功率 Power	最大效率 Max Efficiency	重量 Weight
QX-800S	380V	12Kw	600-900件/小时 600-900pcs/H	3500kgs
	空气消耗 Air consumption	蒸汽消耗 Steam consumption	气压 Air pressure	机器尺寸 Machine dimensions
	0.5立方/小时 0.5cube/hour	150kgs/小时 150kgs/hour	0.6Mpa	运输尺寸 7500*1300*2450 mm 安装尺寸 7500*2300*2650 mm

QX-600S 产品参数 QX-600S Product Parameters

型号 Item No.	电压 Voltage	功率 Power	最大效率 Max Efficiency	重量 Weight
QX-600S	380V	9Kw	400-750件/小时 400-750pcs/H	2700kgs
	空气消耗 Air consumption	蒸汽消耗 Steam consumption	气压 Air pressure	机器尺寸 Machine dimensions
	0.5立方/小时 0.5cube/hour	120kgs/小时 120kgs/hour	0.6Mpa	运输尺寸 6400*1300*2450 mm 安装尺寸 6400*2300*2650 mm

隧道式整烫机系列

TUNNEL FINISHER SERIES

QD-1000S 纯电款隧道式熨烫整型机

QD-1000S Pure Electric Automatic Tunnel Ironing Machine



机器特点 Machine Features



适用服装广
Wide range of Application

各类厚、薄面料，针织、梭织等面料的服装通用，适用范围广泛；
Almost all kinds of thick, thin fabrics, knitted, woven and other fabrics of clothing are universal, a wide range of applications.



免外接锅炉
Automatic bag sealing

无需锅炉，插电即用；行业首创快速升温降温技术；
Need't external boiler, plug and use, more flexible. With Lingchuang unique rapid heating and cooling technology!



高效熨烫
High efficiency Ironing

标准每小时熨烫800-1500件，一天约15000件；
Standard iron 800-1500 pieces/hour, around 15000 pieces/ day.



触控屏幕
Touch screen

全电脑系统控制蒸汽单元、加热单元及热风循环过程；
Full computer system controls the steam unit, heating unit and hot air circulation process.



专利技术
Patent technology

独创专利技术，更低碳、更节能、无水渍、熨烫效果更佳！
Unique patented technology, more energy saving, much better ironing effect, no water stains after ironing. Making fabrics more vibrant!

产品介绍 Product Introduction

用于大批量服装的去皱、熨烫整理，及烘干消毒。此纯电款隧道式整烫机，免外接锅炉，无蒸汽管道布局限制，机器摆放自由，插电即用。且比传统外接锅炉款隧道机更节能，每天约节省1000度电！领创首创快速升温降温专利技术，可在120秒内达到所需温度。领创独有的熨烫专利技术，可激活服装的颜色分子，使服装面料颜色更鲜艳！领创独特的气水分离技术，可分离蒸汽中99.5%的水分，达到熨烫后无水渍，节省人工烘干工序和时间。

将批量服装挂在送料缓存架上，自动进入隧道整烫机的高温蒸汽单元进行面料软化，送热风单元进行熨平、烘干，出料自动送达落料缓存架上。一台机器日熨烫量约15000件，只需1-2人操作，大大减少大中烫工，降低人工成本，提高后整效率。

LC Pure electric Tunnel finisher, use for batch clothing wrinkle removal, ironing, and drying. Machine with built-in boiler, won't limited by external steam pipe layout, placed freely, plug in and use. And it is more energy-efficient than traditional external boiler tunnel machines, saving about 1000 kilowatt per day! Lingchuang pioneer patented technology of rapid heating and cooling, which can reach the required temperature in 120 seconds. Unique ironing patented technology can activate the color molecules of clothes, making the colors of clothing fabrics more vibrant! Unique air & water separation technology, can separate 99.5% water in steam, makes fabric without water stains after ironing, saves manual drying process and time.

Machine with drying function, saving manual drying time and space. A machine daily ironing capacity of about 15,000 pieces, only 1-2 people to operate, greatly reduce the large and medium ironing, reduce labor costs, improve the efficiency of finishing.

QD-1000S产品参数 QD-1000S Product Parameters

型号 Item No.	电压 Voltage	功率 Power	最大效率 Max Efficiency	重量 Weight
QD-1000S	380V	120Kw	800-1500件/小时 800-1500pcs/H	4800kgs
	空气消耗 Air consumption	水消耗 Water consumption	气压 Air pressure	机器尺寸 Machine dimensions
	0.5立方/小时 0.5cube/hour	100kgs/小时 100kgs/hour	0.6Mpa	运输尺寸 9750*1300*2450 mm 安装尺寸 9730*2300*2650 mm

根据实际生产产能，另有QD-800S，QD-600S型号可供选择，具体参数如下：

According to the actual production capacity, there are QD-800S, QD-600S models can be selected, the specific parameters are as follows:

QD-800S产品参数 QD-800S Product Parameters

型号 Item No.	电压 Voltage	功率 Power	最大效率 Max Efficiency	重量 Weight
QD-800S	380V	80Kw	600-900件/小时 600-900pcs/H	3800kgs
	空气消耗 Air consumption	水消耗 Water consumption	气压 Air pressure	机器尺寸 Machine dimensions
	0.5立方/小时 0.5cube/hour	150kgs/小时 150kgs/hour	0.6Mpa	运输尺寸 7500*1300*2450 mm 安装尺寸 7500*2300*2650 mm

QD-600S产品参数 QD-600S Product Parameters

型号 Item No.	电压 Voltage	功率 Power	最大效率 Max Efficiency	重量 Weight
QD-600S	380V	70Kw	400-750件/小时 400-750pcs/H	3000kgs
	空气消耗 Air consumption	水消耗 Water consumption	气压 Air pressure	机器尺寸 Machine dimensions
	0.5立方/小时 0.5cube/hour	120kgs/小时 120kgs/hour	0.6Mpa	运输尺寸 6400*1300*2450 mm 安装尺寸 6400*2300*2650 mm

立式套袋机系列

VERTICAL BAGGING MACHINE

LSQF-1680S 全自动服装立式套袋机

LSQF-1680S Automatic Vertical Garments Bagging Machine



高效包装
Efficient packing

自动批量套袋包装各类挂装的服装；每台标配3米输送线；
Automatic batch bagging of all kinds of hanging clothes; Each unit is equipped with a standard 3-meter conveyor line;



自动检测
Automatic bag sealing

自动识别服装长度，自动下拉并裁切出长度适合的胶袋；
Automatically identify the length of clothing, automatically pull down and cut out the appropriate length of plastic bags.



自动封袋
Adjusting dimensions

热熔封袋，自动上下切封；可选热封或冷封；
Automatic up and down cutting, and automatic sealing.



触控屏幕
Touch screen

全电脑自动控制，无需人工干预；
Full computer automatic control, no manual intervention.



专利技术
Patent technology

领创专利技术，更稳定、更高效！
Unique patented technology, more stable and efficient!

产品介绍 Product Introduction

立式包装是挂装运输的最佳包装方式，可克服服装经运输后产生的皱褶，保持良好外观，是一种提高产品价值的包装方法。立式包装是将衣服挂在衣架上，再吊挂在包装机器内成垂直状态，过程不会发生折叠和压迫，可充分保证商品的外观质量。

领创立式挂装套袋机系列是针对服装立式包装而专门研发的全自动服装立式包装机，实现从衣物自动输送进入—>包装膜上、下封切套袋包装 —>完成输出，整个过程实现全自动化作业，无需人工参与，极大提高了对较长较大衣物的包装效率和褶皱问题。

Vertical packaging is the best packaging method for hanging transportation, which can overcome the wrinkles caused by clothing transportation and maintain a good appearance, and is a packaging method to improve the value of products. Vertical packaging is to hang the clothes on the hanger, and then hang in the packaging machine into a vertical state, the process will not fold and pressure, can fully ensure the appearance of the quality of goods.

LC automatic vertical packing machine is specially developed for vertical packing clothing. The machine realized the automatic Entering> Making suitable plastic bags> Bagging> Sealing> Output, the whole process fully automatic, without manual participation, greatly improve the packing efficiency as well as quality of long and large clothing.

适用服装 Applicable clothing

适合各种需要挂装的高档服装，如皮草、西装外套、大衣、连衣裙等等。

Suitable for a variety of clothing needs to be hung, such as fur coat, suits, coats, dresses, etc.

适用胶袋 Applicable plastic bags

PP/OPP/PE 卷料胶袋

PP/OPP/PE Roll plastic bag

技术参数 Technical Parameter

包装长度范围 Packing length range	长(L)300-1700mm
包装宽度范围 Packing width range	宽(W)500-600mm,
前后输送线 Size range of plastic bags	3000mm
最大速度 Maximum speed	500件/小时 500 pieces/hour
功率 Power	1.2 KW
电压 Voltage	220V
气压 Air Pressure	0.6Mpa
机器尺寸 Machine dimensions	运输尺寸Transport size: L1100*W1500*H3080 mm 安装尺寸Installation size: L7200*W1500*H3080 mm

CN-6KW 智能变频电磁蒸汽发生器

CN-6KW Variable Frequency Electromagnetic Steam Generator



快速加热
Rrapid Heating

特殊炉胆设计, 加热快, 不结垢, 自动排污

Design with Special furnace, heating fast, non-scaling, automatic blowdown.



智能变频
Intelligent frequency conversion

变频电磁感应加热, 比传统电加热锅炉省电35%

Variable frequency electromagnetic induction heating, 35% less electricity than traditional electric heating boiler.



一拖二
One for two irons

一台每小时可产12-15kg蒸汽, 带动2个烫斗

One machine can produce 12-15kg steam per hour, drive 2 irons.



触控屏幕
Touch screen

彩色触控屏全智能控制系统; 可选配远程5G控制模块

Color touch screen full intelligent control system; Remote 5G control module is optional.



专利技术
Patent technology

专利技术, 更安全, 更高效, 更省电

Patented technology, more secure, more efficient, more power saving!

产品介绍 Product Introduction

1. 智能控制, 一键启动;
2. 高速90S产出蒸汽;
3. 变频电磁加热, 超省电;
4. 对水质无要求, 不惧水垢;
5. 三重安全保护, 过压保护, 安全稳定;
6. 流线型工业设计, 自动涮洗炉胆功能; 自动排污;
7. 免水箱设计, 大大减少空间;
8. 创能自主研发, 电路板智能集成化, 芯片小巧, 彩色触摸屏, 智能检修反馈系统;

1. Intelligent control, one key start.
2. High-speed 90S output steam.
3. Variable frequency electromagnetic heating, super power saving.
4. No requirement for water quality, no fear of scale.
5. Triple safety protection, overvoltage protection, safe and stable.
6. Streamlined industrial design, automatic washing furnace gall function, automatic blowdown.
7. Free Water tank design, greatly reduces space.
8. Chuangneng independent research and development, circuit board integration, compact chip, color touch screen, intelligent maintenance feedback system;

技术参数 Technical Parameter

加热方式 Heating method	变频电磁加热 Variable frequency electromagnetic heating
主机功率 Main Power	6KW (可调节/adjustable)
额定电压 Voltage	220V-380V (可适配/Optional)
加热时间 Heating time	5分钟 5 Min
蒸汽压力 Steam pressure	1.0-6.0KGS
水容积 Water Volume	13L
产蒸汽量 Steam production	12-15公斤/小时 12-15 KGS/hour
蒸汽温度 Steam Temperature	160°C
出口口径 Outlet dia.	DN8
排污口径 Drainage Dia.	DN15
机器净重 Net weight	58 KGS
机器尺寸 Machine dimensions	L510*W370*H750 mm

After sale

售后服务

“用心服务客户”是我公司售后服务工作的宗旨，在多年的售后服务工作中我们不断总结经验、不断提高服务质量、增加工作力度，逐步形成一套优质、完善的售后服务体系，解决了用户的后顾之忧。



01检测

我公司在产品出厂前，对产品进行全面性能测试，保证设备合格交付，并提供产品合格证及操作说明书。



02培训

我公司安排专业的技术工程师到达客户所在地进行调试、安装，并免费负责培训贵司技术人员、操作管理人员。

03售后

1. 免费质保一年，终生技术支持。质保期后维修仅收取相应部件的成本费。
2. 专业的技术人员 24 小时电话服务。可提供上门服务，

Honorary qualification

荣誉资质

